




FDNY

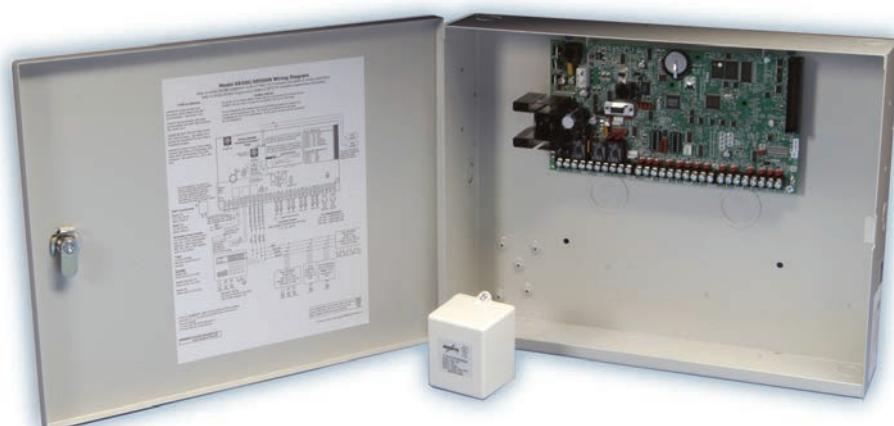

Cellular and network integration in one location

- On-board network & Plug-in Cellular Connection allows for MyAccess™, DMP App, and ePAD™.
- Cost saving communication paths between the panel and Central Station
- Flash Updateable: No more firmware chips to replace
- Adaptive Technology™ — Cost-effective supervised cellular backup
- Up to 500 DMP 1100X or 1100XH Wireless devices
- UL Listed for Burglary, Fire, Access Control
- XR500N with the 463G approved as primary communication by the New York Fire Department (FDNY)
- Supports 2G, 3G, or 4G data networks in the U.S. and Canada

DMP XR500 Series Panels meet all your burglary, fire, and access control needs

XR500 SERIES ACCESS/BURGLARY/FIRE 574-ZONE PANEL

SYSTEM FEATURES

- Select Area, All/Perimeter, or Home/Sleep/Away operation
- 32 individual reporting areas, with common areas
- Up to 16 supervised door access-points and/or keypads
- 32 character names available for user, zone, area, profiles and group names
- Fully supervised network and cellular communication
- Communications Diagnostics check network and cellular communication status from the keypad.
- Multi-Tenant Functions provides individualized protection and control for multiple areas within a single system
- Guest operation allows up to three separate protected systems
- Flexible system arming features, with Instant Arming option
- Up to 562 two-wire smoke detector or fire-initiating zones
- 10,000 user codes with 99 profiles
- Mobile platform support via text, App & ePad™

- 12,000 event buffer
- Up to 100 output schedules to control relays and panel outputs
- Built-in phone line monitor
- Multi-lingual menus by user
- 1.5 Amps 12 VDC smoke and auxiliary output with OVC protection

XR500N/XR500E SYSTEM FEATURES

- On-board Ethernet
- Bank, Safe and Vault Operation
- Two Man Rule, Panic Button Test and Early Morning Ambush

XR500E SYSTEM FEATURES

- Built-in AES (Advanced Encryption Standard) Encryption
- NIST Certified and UL Listed Encryption



FLEXIBLE COMMUNICATION

The XR500N has transitioned from dialer-focused communications to a true network and cellular communications approach by providing stronger, multi-layered panel communications that ensure a constant link between the panel and Central Station. Installers have the ability to create, configure and manage up to eight communication paths.

The unique DMP Serial 3 format supports 32-character user, zone and area names to decrease the central station response time and limit dependence on automation literal tables for message conversion.

NETWORK OR CELLULAR COMMUNICATION

Built-in Ethernet Communications enhance network options and, both Standard and Encrypted Line Security. Both UDP and TCP are supported. The network option can be used as the primary or backup path to the digital dialer or cellular option.

The 463G/463C plug-in Digital Cellular Communicator can be used as the primary path, providing installation flexibility where no land lines are available. It can be used as a stand-alone communicator without the need for a backup for commercial fire applications when used with the XR500FC Series fire panels per NFPA 72. When used as the backup path, the 463G/463C provides the security of a communication link that continues to function, even when landlines are cut or compromised. This interface works on digital Cellular data networks over a variety of carriers in the USA and Canada.

The 464 Cellular Communicator Series supports CDMA & HSPA+ communication, providing a fully supervised alarm communication path over the 3G/4G network. Both the 464-263C and the 463-263H are installed in the panel enclosure and powered by the panel, so no additional enclosure, power supply or battery back-up is needed.

ADAPTIVE TECHNOLOGY

If a current primary communication path becomes unavailable, Adaptive Technology directs the panel to make a seamless transition from one communication path to another, ensuring that no check-in or supervision messages are missed. This allows a system to be fully supervised when the primary communication path is unavailable, while minimizing expensive cell traffic when all paths are good. The panel is constantly checking the failed path to enable the panel to revert back to the primary path when communication is restored.

EIGHT COMMUNICATIONS PATHS

Create, configure, and manage up to eight communication paths between the panel and Central Station. Each path has its own panel communication programming parameters, and can be identified as either primary or backup. This enables installers to configure a reliable communication link, offering greater confidence that the panel will always be connected to the Central Station.

MOBILE PLATFORMS

DMP mobile platforms provide you with the tools you need to build strong connections with your customers.

- MyAccess™ enables end users to monitor and manage their systems remotely from any mobile phone using simple SMS texting.
- The DMP App puts a keypad on the user's Apple iPhone®, iPad™, or Android compatible devices.
- The ePad™ puts a Mobile Keypad on any browser or mobile device.

Dealers can offer these much-appreciated services to their customers and realize the benefits of additional recurring revenue.

COMMUNICATION FUNCTION DIAGNOSTICS

The enhanced diagnostic menu enables technicians to check network and cellular communication status, cell signal strength, and email status from the keypad.

FALSE ALARM FEATURES

Providing end users with a way to reduce false alarms, both Cancel/Verify™ and the False Alarm Question features prompt end users to validate whether an alarm has occurred after entering their code. In a Home/Sleep/Away or All/Perimeter system, the user can either press VERIFY or YES to manually confirm a valid burglar alarm and an alarm is then sent to the Central Station.

GUEST OPERATION

Using the Home/Sleep/Away with Guest House operation, create up to three separate systems (main and two guest). Keypads in each system can selectively arm the perimeter, interior, or bedrooms for only their protected areas. Main system users can add authorized users to all protected areas, but guests can add users only for their protected system.

MULTI-TENANT FUNCTIONS

For commercial or multi-family residential installations, Multi-Tenant Operation enables the transmission of alarms and alerts by area account number instead of system account number enabling tenants and Central Stations to identify specific zone events. Tenants can only silence alarms originating in their protected area.

AREAS

Program up to 32 areas with a variety of options, including independent arming. Each area has a unique name and may have its own account number.

Common areas automatically arm when the last independent area is armed and disarm when the first independent area is disarmed. This is ideal for lobbies or areas where users need common access to specific areas only.

DMP WIRELESS

DMP wireless communication employs 900MHz frequency-hopping spread-spectrum to ensure clear and accurate signal transmissions without interference in practically any environment. Receivers are alerted of transmitters that go missing with Two-Way communication. Each wireless transmitter communicates with the receiver using supervision messages.

The on-board LED on all 1100 Series Transmitters provides built-in survey capability to allow for single-person installations, eliminating the requirement for an external survey kit.

Exclusive DMP Wireless features include Sensitivity, Pulse Count, Walk Test, & Disarm Disable. Motion sensors can be configured from the panel, allowing for simple, fast, one-person installation. Adjustable sensitivity via panel programming, battery-saving Disarm Disable, pulse count programming that allows multiple triggers before an alarm is initiated, and Walk Test Mode for sensor setup. Wireless Receivers and repeaters are authorized for wireless Commercial Burglary and Commercial Fire applications.

ACCESS CONTROL BURGLARY INTEGRATION

The XR500 is an integrated burglary, fire and access control system that can be configured for users to gain access and disarm the area using a single card read!



ZONE EXPANSION

The XR500 provides up to 574 zones, programmable for burglary, fire, and access applications. The system contains eight burglary zones and two Class B 12 VDC powered zones. Up to 64 zones are available on 16 keypad addresses and up to 100 zones are available on the built-in LX-Bus. Add up to 500 zones using Expansion Modules.

ONE-MAN WALK TEST

A special code is also available for installers to test the system. The One-Man Walk Test feature allows a single technician to check the panel response to burglary, fire, panic, and supervisory zones.

OUTPUTS

The XR500 provides up to 506 outputs that can be activated by zone or system events, by schedule, through the User Menu or when a card is presented. Output Groups allow multiple outputs to activate with a single event and/or can be assigned to a particular user profile.

OUTPUT SCHEDULES

Achieve maximum system flexibility with 100 programmable schedules that simplify planning and operations. Control any contact-activated device with schedules that automatically regulate relays and switched-ground outputs.

DOOR STRIKE SCHEDULES WITH OVERRIDE

Specific doors may use output schedules to unlock during certain times of the day or night, or the card reader can be completely disabled when desired. The schedule override feature keeps doors locked should the business open later or close earlier than scheduled.

MULTI-LINGUAL DISPLAY OPTION

XR500 Series systems may be programmed to display the User Menu and Status Display text in multiple languages by user.

ENCRYPTION

The XR500E provides encrypted data transmission and is ideal for secure environments where encrypted data is required. Using AES (Advanced Encryption Standard) Encryption ensures secure data transmission by using a unique alphanumeric passphrase. UL Listed and NIST Certified Encryption.

REAL-TIME STATUS ENHANCES 3RD-PARTY INTEGRATION

Alarm systems are increasingly being integrated with environmental control and home automation systems. With real-time status information from zones, doors, and other outputs, XR500 Series panels are readily integrated with these third-party control and automations systems.

SHIFT SCHEDULES WITH HOLIDAYS

Up to four independent Shift schedules are available for each of the 32 areas.

KEYPAD SHORTCUT KEYS

Time-saving shortcut keys provide one-button access to system control, making frequently used functions like system arming, fast and simple. The shortcut keys enable users to arm, monitor zones, test, or reset the system and perform a variety of other functions faster and easier. Shortcut keys included are: All, Reset, Home, Chime, Perim, and Sleep.

ACCESS CONTROL

The XR500 system can restrict access by schedule, arming level, or other criteria. The specific reason for access denial can be displayed on the keypad, stored in events, logged on a local printer (DMP 462P required), sent to the central station, and to DMP Advanced Reporting software. Anti-passback feature also available.

16 INDEPENDENT ACCESS CONTROL DOORS

Any access control reader with a Wiegand output can be connected to the XR500 Series panel. Attach card reader inputs to up to 16 different locations.

THINLINE™ AND AQUALITE™ KEYPADS

The stylish and sleek 7000 Series keypads provide three 2-button Panic keys, AC power and Armed LEDs, 32-character display, backlit logo and keyboard plus an internal sounder. Aqualite Series keypads offer a brilliant Aqua colored LCD display and backlighting. The 7063 keypad also includes a built-in proximity reader for codeless arming and disarming.



Aqualite/Thinline Keypad

VALUABLE VISUAL ALARM INDICATOR


In a normal state, both the keypad and logo backlighting remain Blue on Aqualite keypads or Green on Thinline keypads. However, during an alarm state, the keypad and logo turn Red. The change in color allows persons on-site to instantly recognize an alarm condition.



Red Backlighting for Alarm Conditions

7800 GRAPHIC KEYPAD

Provides Touchscreen control for all keypad functions. Slim profile in stylish gloss black or white finish with a 5 inch, full-color display.

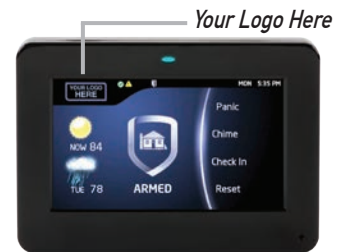

7800 Graphic Touchscreen Keypad

9000 SERIES WIRELESS KEYPAD

The 9060 and 9063 Wireless Keypads are supervised keypads that provide installation flexibility. These full-feature keypads include four 2-button panic keys and an internal sounder. The backlit keypad is easy to read, and both the keypad and logo turn Red in alarm conditions, providing a visual alert. Both Keypads have a 32-character display, and can be programmed with a 16-character home or business name. The 9063 keypad also includes a built-in proximity reader for codeless arming and disarming.



XR500

KEYPADS

| | |
|-------|------------------------------------|
| 630F | LCD Remote Fire Command |
| 7000 | Series Thinline Keypads |
| 7000A | Series Aqualite Keypads |
| 7100 | Series Thinline Keypads |
| 7760 | Clear Touch Keypad |
| 7800 | Series Graphic Touchscreen Keypads |
| 9060 | Wireless Keypad |
| 9063 | Wireless Keypad w/ Prox Reader |
| ePAD™ | Mobile Keypad |

EXPANSION MODULES

| | |
|--------|---|
| 708 | Bus Extender |
| 710 | Bus Splitter/Repeater |
| 711 | Single Zone Expansion |
| 712-8 | 8-zone Expansion |
| 714 | 4-zone Class B Expansion |
| 714-8 | 8-zone Class B Expansion |
| 714-16 | 16-zone Class B Expansion |
| 715 | 4-zone 2-wire smoke Expansion |
| 715-8 | 8-zone 2-wire smoke Expansion |
| 715-16 | 16-zone 2-wire smoke Expansion |
| 716 | Output Expansion, 4 Form C relays, 4 open collector outputs |
| 717 | Graphic Annunciator: 20 open collector outputs |
| 736P | Radionics Interface |
| 739 | X-10 Interface |

INTERFACE CARDS

| | |
|------|--------------------------|
| 461 | Interface Adaptor Card |
| 462N | Network Interface Card |
| 462P | Printer Interface Card |
| 481 | Expansion Interface Card |

CELLULAR COMMUNICATORS

| | |
|----------|--|
| 463G | 2G Digital Cellular Communicator (AT&T, T-Mobile, Rogers) |
| 463C | 3G CDMA Cellular Communicator (Verizon) |
| 464-263C | 3G CDMA Cellular Communicator (Verizon) |
| 464-263H | 4G HSPA+ Cellular Communicator (AT&T, T-Mobile) |

AUXILIARY MODULES

| | |
|------|---------------------------------------|
| 860 | Relay Output Module |
| 865 | Style W/X Notification Circuit Module |
| 866 | Style W Notification Circuit Module |
| 867 | LX-Bus Notification Circuit Module |
| 869 | Style D Initiating Circuit Module |
| 893A | Dual Phone Line Module |

SYSTEM SPECIFICATIONS

| | |
|--------------------------|--|
| Primary Power (included) | 16.5 VAC 50 VA transformer |
| Secondary Power Models | 12 VDC Battery 365, 366, 368 or 369 |
| Output Rating | |
| Bell | 1.5 Amps at 12 VDC |
| Smoke and Auxiliary | 1.5 Amps at 12 VDC |
| Current Draw | 180mA |
| Enclosures: | |
| Material | Cold-rolled steel |
| Model 350 (Gray or Red) | 17.5" W x 13.5" H x 3.5" D |
| Model 350A (Gray) | 17.5" W x 13.5" H x 3.75" D |
| Model 352X (Gray) | 14.5" W x 32" H x 4.0" D |
| Model 341 (Gray) | 12.75" W x 6.55" H x 3.15" D |

SMOKE/HEAT DETECTORS

| | |
|-----------|-----------------------------------|
| 521B/BXT | Addressable Smoke, CleanMe |
| NS6-100W | Detector Base |
| 521LX/LXT | Addressable Smoke/Heat CleanMe |
| SLR-835B | Conventional Smoke |
| SLR-835BH | Conventional Smoke/Heat |

POWER SUPPLIES

| | |
|-----------|-----------------|
| 505-12/LX | 5 Amps @ 12 VDC |
| 505-12L | 5 Amps @ 12 VDC |
| 505-12A | 5 Amps @ 12 VDC |

INTRUSION DETECTORS

| |
|---|
| Sentrol® Contacts and Sensors |
| Optex PIRs |
| Potter Contacts and Sensors |
| Tane Contacts and Water Sensors |
| Virtually any other Intrusion Detectors |

ACCESS CONTROL

| | |
|-----------------------------------|----------------------------------|
| 734 | Wiegand Interface Module |
| 734N | Network Wiegand Interface Module |
| 734N-WIFI | WiFi Wiegand Interface Module |
| OP-08CB | REX Motion Detector |
| PB-2 | Request-to-Exit Button |
| Proximity Readers and Credentials | |
| DMP ProxPatch | |

CENTRAL STATION RECEIVERS

| | |
|--|--|
| SCS-1R | Security Control Receiver |
| SCS-105 | Single-Line DMP Serial 3 Receiver |
| Compatible with Receivers that accept Standard CID, DD, or DMP Serial 3 messaging | |
| SCS-VR (Virtual Receiver) - Software only | solution that runs on a server for network IP and cellular communications |

DMP WIRELESS

| | |
|--------|--|
| 1100X | Receiver |
| 1100XH | High Power Receiver |
| 1100R | Repeater |
| 1101 | Universal Transmitter, Internal and External Contacts |
| 1102 | Universal Transmitter, External Contact |
| 1103 | Universal Transmitter, External Contact |
| 1105 | Universal Transmitter, Internal and External Contact |
| 1107 | Micro Window Transmitter |
| 1114 | Four-Zone Expander |
| 1116 | Relay Output |
| 1117 | LED Annunciator |



DMP WIRELESS CONTINUED

| | |
|-----------|---|
| 1118 | Remote Indicator Light |
| 1119 | Door Sounder |
| 1121 | Pet Immune PIR Motion Detector |
| 1125 | PIR Motion Detector |
| 1126C | Ceiling Mount Curtain PIR |
| 1126R | 360 Ceiling Mount PIR |
| 1127C | Wall Mount Curtain PIR |
| 1127W | Wall Mount Wide Angle PIR |
| 1129 | Glassbreak Detector |
| 1131 | Recessed Contact |
| 1135 | Siren 100 dB |
| 1135DB | Siren, 110 dB |
| 1139 | Bill Trap |
| 1142 | Two-Button Hold-up Transmitter |
| 1142BC | Two-Button Belt Clip Hold-up Transmitter |
| 1145-4-B | Four-Button Key Fob |
| 1145-2-B | Two-Button Key Fob |
| 1145-1-B | One-Button Key Fob |
| 1161 | Residential Smoke Detector |
| 1162 | Residential Smoke/Heat Detector |
| 1165 | Commercial Smoke Detector |
| 1165H | Commercial Smoke/Heat Detector |
| 1165HS | Commercial Smoke/Heat Detector with Sounder |
| 1181 | Post Indicator Valve (UL) |
| 1182 | Outside Screw and Yoke Valve Supervisory Switch (UL) |
| 1183-135F | Heat Detector (Fixed) |
| 1183-135R | Heat Detector (Rate of Rise) |
| 1184 | Carbon Monoxide Detector |

ACCESSORIES

| | |
|-------|---------------------------|
| 300 | Four-wire Harness |
| 303 | Silence/Reset Push-Button |
| 305 | Plug-in Output Relay |
| 306 | Tamper Harness |
| 307-S | Screw-On Tamper Switch |
| 3012 | Clip-On Tamper Switch |
| 335 | Intrusion Siren |
| 370 | Lightning Suppressor |
| 374 | Surge Voltage Suppressor |
| 431 | Output Harness |
| 861 | Power Distribution Module |

COMPUTER SOFTWARE

| |
|--|
| Remote Link Programming Software |
| System Link End-User Management Software |
| Link Server Application |
| Entré Access Control Software |

LISTINGS AND APPROVALS

Refer to the XR500 Series Installation Guide (LT-0681, LT-0681CAN), XR500 Series Programming Guide (LT-0679, LT-0679CAN) and specific compliance listings for installation and programming requirements necessary to meet a particular approval.

ANSI/SIA CP-01-2010 False Alarm Reduction

California State Fire Marshal (CSFM)

FCC Part 15

FCC Part 68

New York City (FDNY COA #6123)

NIST Validated XR500E Encrypted Command Processor Certificate #130

Underwriters Laboratories (UL) Listed

UL Bank, Safe and Vault

UL Standard Line Security

UL Encrypted Line Security

Underwriters Laboratories Canada (ULC) Listed

For additional information, visit www.dmp.com and select Compliance.



Intrusion | Fire | Access | Network | Cellular

2500 North Partnership Boulevard
Springfield, Missouri 65803-8877

800.641.4282 | dmp.com
Designed, Engineered & Assembled
in Springfield, Missouri

